















## Features

- Wide input range 180 ~ 528VAC
- Constant Voltage + Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming (dim-to-off); Timer dimming
- Typical lifetime>50000 hours
- 5 years warranty


# Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HVG-100 series is a 100W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HVG-100 operates from 180~528VAC and offers models with different rated voltage ranging between 15V and 54V. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40°C ~ +90°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVG-100 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## Model Encoding

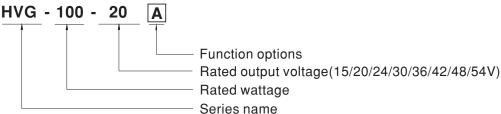

Type	IP Level	Function	Note
Α	IP65	Io and Vo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Built-in Smart timer dimming function by user request.	By request

# 100W Constant Voltage + Constant Current LED Driver


### **SPECIFICATION**

MODEL		HVG-100-15	HVG-100-20	HVG-100-24	HVG-100-30	HVG-100-36	HVG-100-42	HVG-100-48	HVG-100-54
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	9~15V	10~20V	12~24V	15~30V	18~36V	21~42V	24~48V	27~54V
	RATED CURRENT	5A	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A
	RATED POWER	75W	96W	96W	96W	95.4W	95.76W	96W	95.58W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
		Adjustable for A-Type only (via the built-in potentiometer)							
	VOLTAGE ADJ. RANGE	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
OUTPUT		Adjustable for A-Type only (via the built-in potentiometer)							
	CURRENT ADJ. RANGE	2.75 ~ 5A	2.64 ~ 4.8A	2.2 ~ 4A	1.76 ~ 3.2A	1.45 ~ 2.65A	1.25 ~ 2.28A	1.1 ~ 2A	0.97 ~ 1.77A
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME Note.6	500ms, 80ms /:	230VAC, 347VA	C, 480VAC		1			
	HOLD UP TIME (Typ.)	30ms/347VAC, 480VAC							
	(71)	180 ~ 528VAC 254VDC ~ 747VDC							
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" section)							
	FREQUENCY RANGE	47 ~ 63Hz							
	POWER FACTOR (Typ.)	PF≥0.98/230VAC, PF≥0.98/277VAC, PF≥0.97/347VAC, PF≥0.93/480VAC @full load  (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)							
				( )	347VAC [@ load]		5V modell: @ lo	ad>75%//80\/	AC)
NPUT	TOTAL HARMONIC DISTORTION	, , ,			TION (THD)" sec	•	o v 1110ucij, w 10	uu ⊆ 1 0 /0/400 V	10)
141 01	EFFICIENCY (Typ.)	89%	90%	91%	91%	90.5%	90.5%	91%	91%
	AC CURRENT (Typ.)	0.38A / 347VAC			9170	30.376	90.576	9170	3170
	INRUSH CURRENT (Typ.)				b Ipeak) at 480VAC	· Dor NEMA 410			
		COLD STAIRT 2	JA(twidti1=900μS i	illeasured at 50 /	ipeak) at 400 VAC	, FEI NEWA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER  5 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 480VAC								
	LEAKAGE CURRENT	<0.75mA / 480VAC							
	LLARAGE CORRENT		/AC						
	OVER CURRENT	95 ~ 108%							
		Constant current limiting, recovers automatically after fault condition is removed  Constant current limiting, recovers automatically after fault condition is removed							
PROTECTION	SHORT CIRCUIT			ers automatically 28 ~ 34V		1	47 ~ 53V	F4 C0)/	E0 CEV
	OVER VOLTAGE	18 ~ 21V	23 ~ 27V		34 ~ 38V	41 ~ 46V	41 ~ 55V	54 ~ 60V	59 ~ 65V
		Shut down o/p voltage with auto-recovery or re-power on to recovery							
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down  Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)							
	WORKING TEMP.		U C (Please refe	r to "OUTPUT L	OAD VS TEMPER	ATURE" Section,	)		
	MAX. CASE TEMP.	Tcase=+90°C							
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing							
	TEMP. COEFFICIENT	±0.03%°C (0~60°C)							
	VIBRATION	10 ~ 500Hz, 50	12min./1cycle,	period for 72min	n. each along X, `	Y, Z axes			
	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No. 250.0-08(except for 42V,48V, 54V), IP65 or IP67 approved							
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC							
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-F0	G, O/P-FG:100M	Ohms/500VD	C / 25°C / 70% R	Н			
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (@ load≥50% load,@ load≥60% only for 15V model); EN61000-3-3, FCC Part 15 Subpart B							
	EMC IMMUNITY	Compliance to	EN61000-4-2,3,4	4,5,6,8, <mark>1</mark> 1, EN61	1547, light industr	ry level (surge im	munity Line-Eart	h 4KV, Line-Line	2KV)
	MTBF	174.9K hrs min. MIL-HDBK-217F (25°C)							
OTHERS	DIMENSION	236*68*38.8mr	n (L*W*H)						
	PACKING	1.18Kg; 12pcs/	15.2Kg/0.74CUF	Т					
2. Ripple & noise are measured at 3. Tolerance: includes set up tolera 4. Please refer to "DRIVING METH 5. De-rating may be needed under 6. Length of set up time is measure 7. The driver is considered as a co- complete installation, the final eq 8. This series meets the typical life 9. Please refer to the warranty state			y mentioned are measured at 347VAC input, rated load and 25°C of ambient temperature.  d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  tolerance, line regulation and load regulation.  IETHODS OF LED MODULE".  Ider low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.  assured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.  a component that will be operated in combination with final equipment. Since EMC performance will be affected by the all equipment manufacturers must re-qualify EMC Directive on the complete installation again.  I life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 80°C or less. statement on MEAN WELL's website at http://www.meanwell.com  lerating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft)						




#### ■ Block Diagram

Fosc: 80KHz

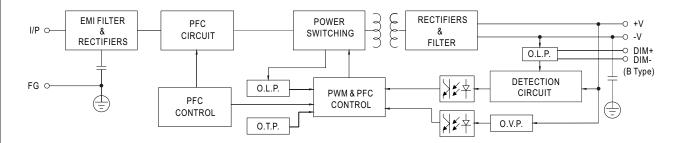

#### **■** DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

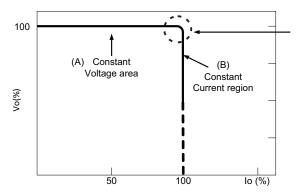


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




#### **■ DIMMING OPERATION**




#### imes 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM: 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 0 ~ 10VDC

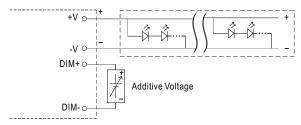


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

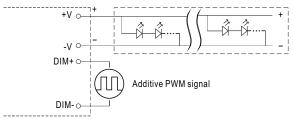



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

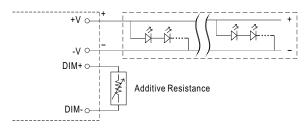

"DO NOT connect "DIM- to -V"








Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



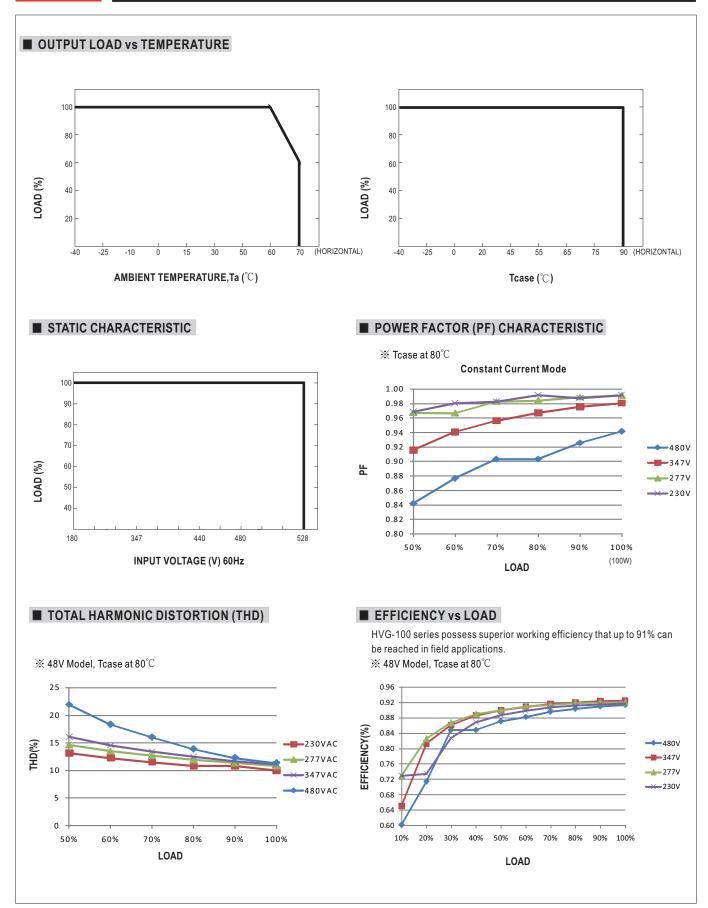




# ■ LIFE TIME

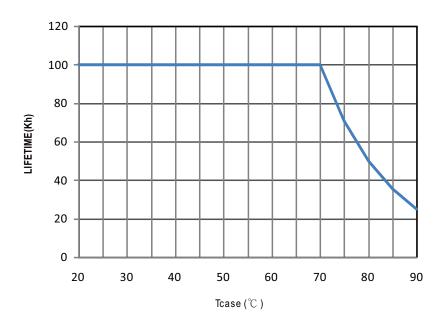

# HVG-100 series

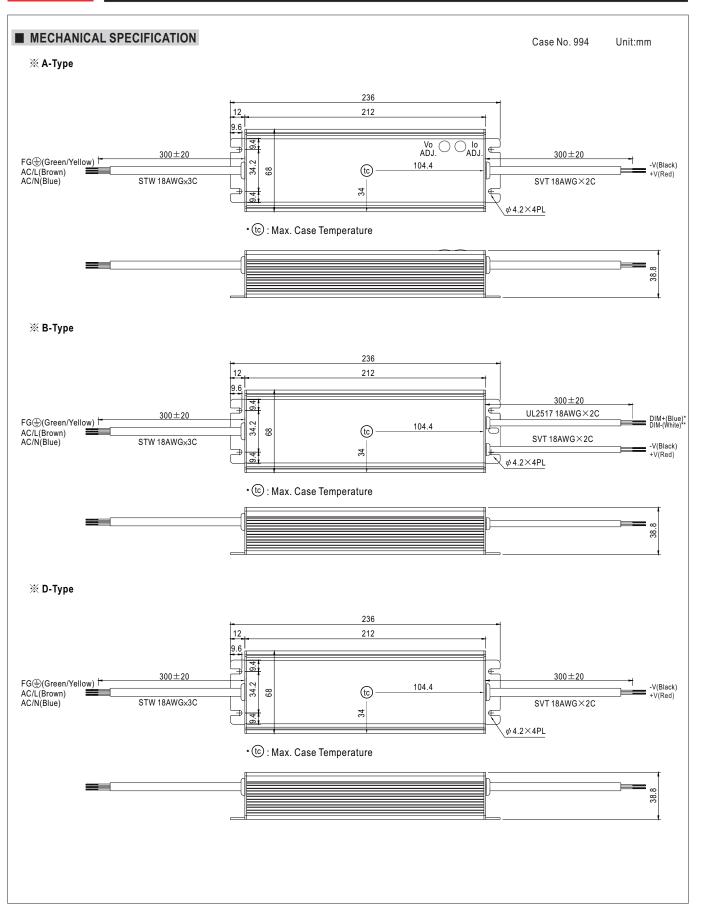


## 100W Constant Voltage + Constant Current LED Driver

### ■ WATERPROOF CONNECTION


#### **X** Waterproof connector

 $Waterproof connector \ can \ be \ assembled \ on \ the \ output \ cable \ of \ HVG-100 \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$ 




Size	Pin Configuration (Female)			
M12	000	000		
IVI I Z	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	00		
IVITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		




#### ※ Cable Joiner

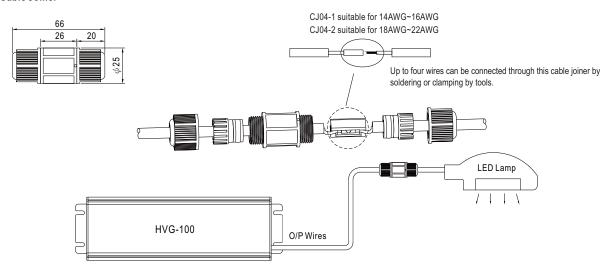

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

#### **※** Junction Box Option

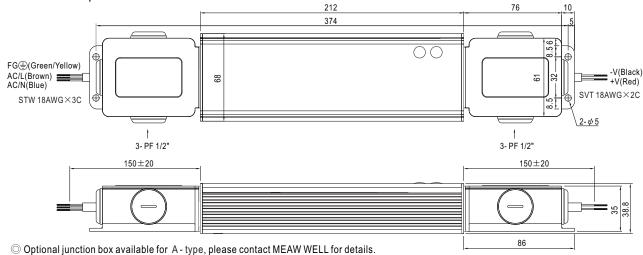

#### ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html